Lecture 11

Asserts and Error Handling

Announcements for Today

(Optional) Videos

- **Lesson 13, 14** for today
- **Videos 15.1-15.7** next time

- **Prelim, Oct 19th 7:30-9:00**
  - Material up October 5th
  - Study guide next week
- **Conflict with Prelim time?**
  - Submit to Prelim 1 Conflict assignment on CMS
  - Do not submit if no conflict

Assignments

- Finishing **Assignment 1**
  - We are going to score it
  - Get **one more** chance Sun.
- **Assignment 2** due **tonight**
  - Will grade it this weekend
  - Solutions posted on Monday
- **Assignment 3** due next week
  - Before you leave for break
  - Same "length" as A1

Using Color Objects in A3

- New classes in `introcs`
  - RGB, CMYK, and HSL

- Each has its own attributes
  - **RGB**: `red, blue, green`
  - **CMYK**: `cyan, magenta, yellow, black`
  - **HSL**: `hue, saturation, light`

- Attributes have *invariants*
  - Limits the attribute values
  - Example: red is int in 0..255
  - Get an error if you violate

```
c    id1

r    128
```

```
          id1
                RGB

red       128

green      0

blue       0
```
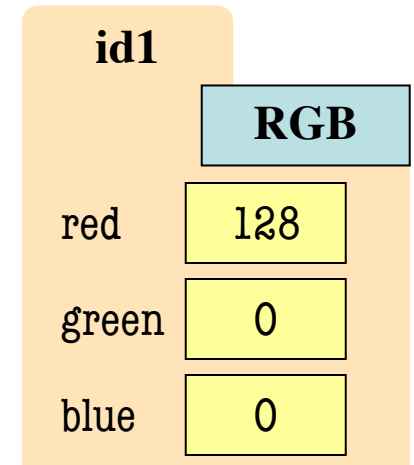
```
>>> import introcs
>>> c = introcs.RGB(128,0,0)
>>> r = c.red
>>> c.red = 500 # out of range
AssertionError: 500 outside [0,255]
```

Using Color Objects in A3

- New classes in `introcs`
  - RGB, CMYK, and HSL

- Each has its own attributes
  - **RGB**: red, blue, green
  - **CMYK**: cyan, magenta, yellow, black
  - **HSL**: hue, saturation, light

- Attributes have *invariants*
  - Limits the attribute values
 - Example: red is int in 0..255
  - Get an error if you violate

c | **id1**

r | 128

id1

RGB

red | 128
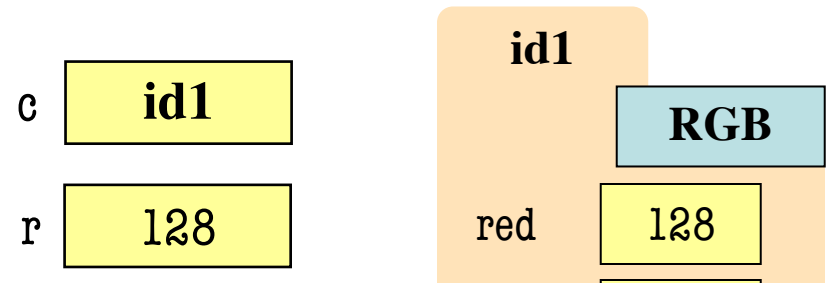
Constructor function. To make a **new** color.

```
>>> import introcs
>>> c = introcs.RGB(128,0,0)
>>> r = c.red
>>> c.red = 500 # 
AssertionError: 500
```

Accessing Attribute

Recall: The Call Stack

- Functions are **stacked**
  - Cannot remove one above w/o removing one below
  - Sometimes draw bottom up (better fits the metaphor)
- Stack represents memory as a ***high water mark***
  - Must have enough to keep the **entire stack in memory**
  - Error if cannot hold stack

Frame 1
Frame 2
Frame 3
Frame 4
Frame 5

calls

calls

calls

calls
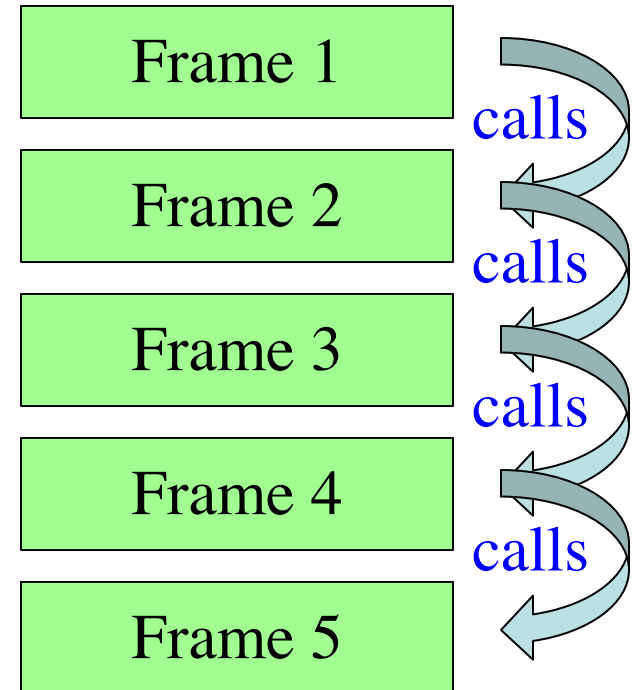
Error Messages

Not An Error Message

ZeroDivisionError: division by zero

> Everything starting with the Traceback

An Error Message

Traceback (most recent call last):
  File "error.py", line 41, in <module>
    print(function_1(1,0))
  File "error.py", line 16, in function_1
    return function_2(x,y)
  File "error.py", line 26, in function_2
    return function_3(x,y)
  File "error.py", line 36, in function_3
    return x/y
ZeroDivisionError: division by zero

Errors and the Call Stack

```
# error.py

def function_1(x,y):
    return function_2(x,y)

                        calls

def function_2(x,y):
    return function_3(x,y)

                        calls

def function_3(x,y):
    return x/y # crash here

                        calls

if __name__ == '__main__':
    print(function_1(1,0))
```

Errors and the Call Stack

```
# error.py

def function_1(x,y):
    return function_2(x,y)


def function_2(x,y):
    return function_3(x,y)


def function_3(x,y):
    return x/y # crash here


if __name__ == '__main__':
    print(function_1(1,0))
```

Crashes produce the call stack:

```
Traceback (most recent call last):
  File "error.py", line 20, in <module>
    print(function_1(1,0))
  File "error.py", line 8, in function_1
    return function_2(x,y)
  File "error.py", line 12, in function_2
    return function_3(x,y)
  File "error.py", line 16, in function_3
    return x/y
```

Make sure you can see line numbers in Atom.

Errors and the Call Stack

```
#
```

Script code. Global space

```
d
    return function_2(x,y)

def function_2(x,y):
    return function_3(x,y)

def function_3(x,y):
    return x/y # crash here

if
```

Where error occurred (or where was found)

Crashes produce the call stack:

Traceback (most recent call last):

File "error.py", line 20, in <module>
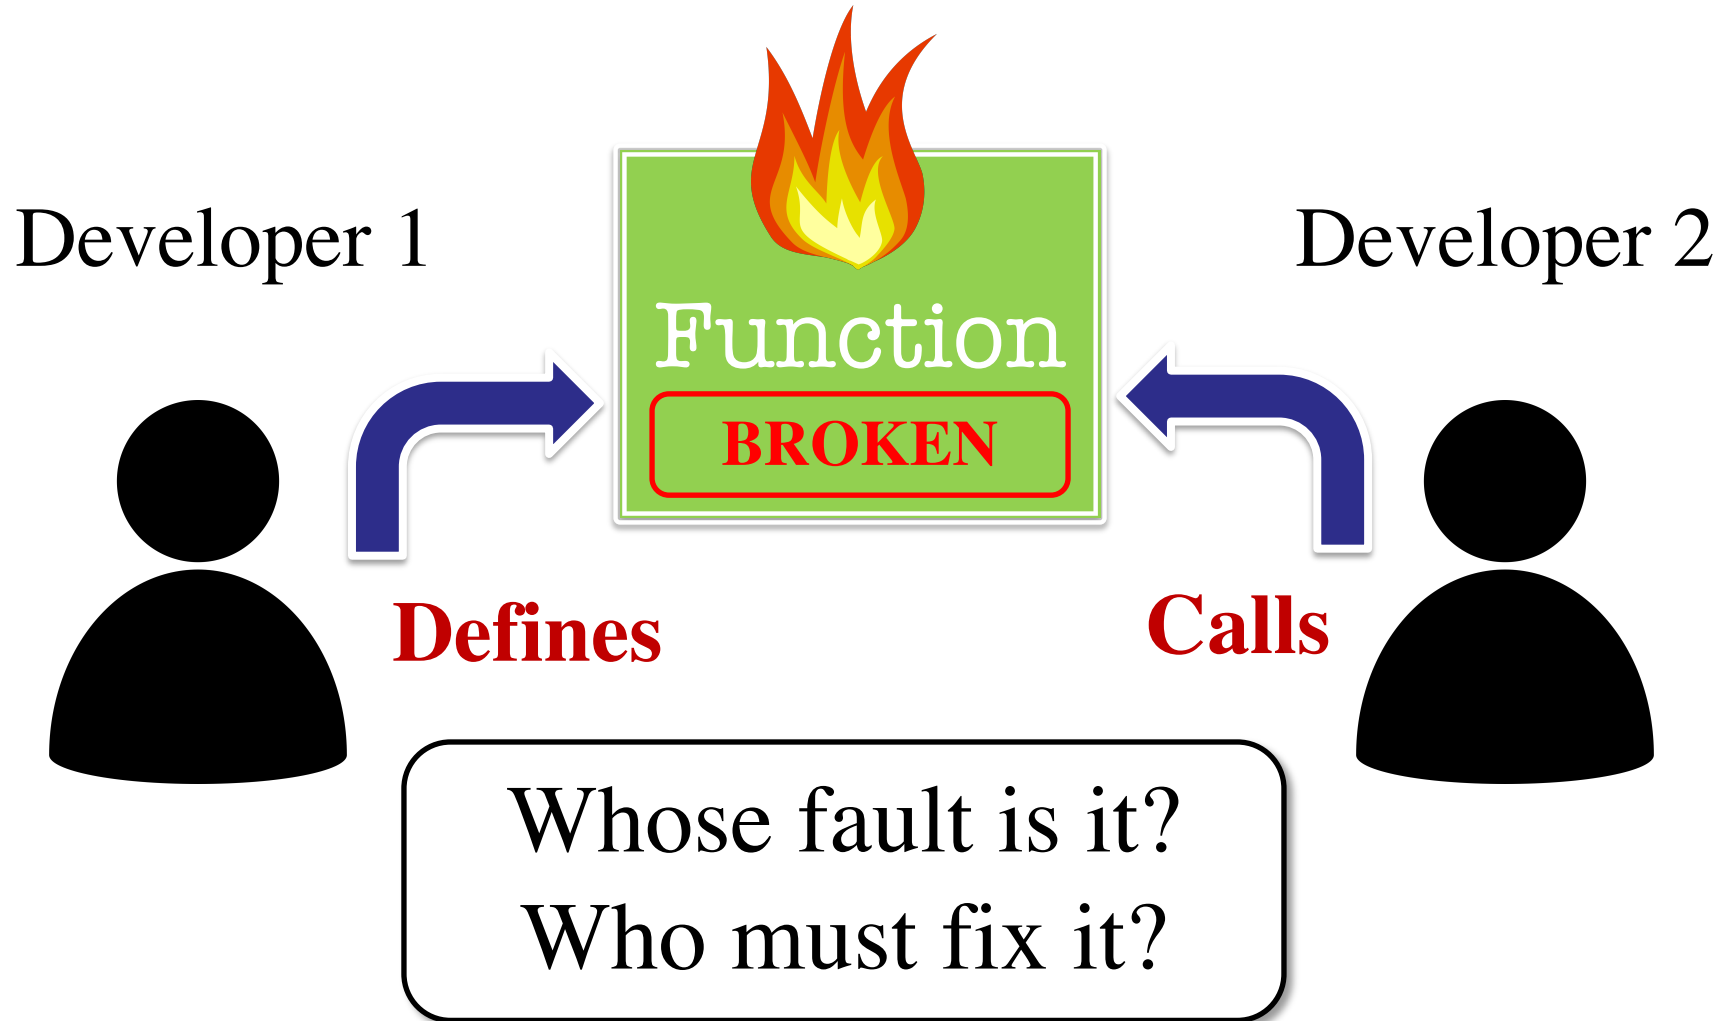 print(function_1(1,0))

File "error.py", line 8, in function_1
  return function_2(x,y)

File "error.py", line 12, in function_2
  return function_3(x,y)

File "error.py", line 16, in function_3
  return x/y

Make sure you can see line numbers in Atom.

Recall: **Assigning Responsibility**

Developer 1

Function

BROKEN

Developer 2

Defines

Calls

Whose fault is it?
Who must fix it?

Determining Responsibility

```python
def function_1(x,y):
    """Returns: result of function_2

    Precondition: x, y numbers"""
    return function_2(x,y)


def function_2(x,y):
    """Returns: x divided by y

    Precondition: x, y numbers"""
    return x/y

print(function_1(1,0))
```

Traceback (most recent call last):

File "error1.py", line 32, in <module>
  print(function_1(1,0))

File "error1.py", line 18, in function_1
  return function_2(x,y)

File "error1.py", line 28, in function_2
  return x/y

ZeroDivision...

Where is the error?

Approaching the Error Message

- Start from the top

- Look at function call
  - Examine arguments
  - (Print if you have to)
  - Verify preconditions

- Violation? Error found
  - Else go to next call
  - Continue until bottom

```
Traceback (most recent call last):

File "error1.py", line 32, in <module>
    print(function_1(1,0))

File "error1.py", line 18, in function_1
    return function_2(x,y)

File "error1.py", line 28, in function_2
    return x/y

ZeroDivisionError: division by zero
```

Determining Responsibility

```python
def function_1(x,y):
    """Returns: result of function_2

    Precondition: x, y numbers"""
    return function_2(x,y)


def function_2(x,y):
    """Returns: x divided by y

    Precondition: x, y numbers"""
    return x/y


print(function_1(1,0))
```

Traceback (most recent call last):

File "error1.py", line 32, in **A** dule>
    print(function_1(1,0))

File "error1.py", line 18, in **B** tion_1
    return function_2(x,y)

File "error1.py", line 28, in **C** tion_2
    return x/y

ZeroDivision

Where is the error?

Determining Responsibility

```python
def function_1(x,y):
    """Returns: result of function_2

    Precondition: x, y numbers"""
    return function_2(x,y)


def function_2(x,y):
    """Returns: x divided by y

    Precondition: x, y numbers"""
    return x/y


print(function_1(1,0))
```

Traceback (most recent call last):

File "error1.py", line 32, in <module>
  print(function_1(1,0))

File "error1.py", line 18, in function_1
  return function_2(x,y)

File "error1.py", line 28, in function_2
  return x/y

Error!

ZeroDivisionError: division by zero

Determining Responsibility

```python
def function_1(x,y):
    """Returns: result of function_2

    Precondition: x, y numbers"""
    return function_2(x,y)


def function_2(x,y):
    """Returns: x divided by y

    Precondition: x, y numbs, y > 0"""
    return x/y


print(function_1(1,0))
```

Traceback (most recent call last):

File "error1.py", line 32, in **A** dule>
  print(function_1(1,0))

File "error1.py", line 18, in **B** tion_1
  return function_2(x,y)

File "error1.py", line 28, in **C** tion_2
  return x/y

ZeroDivision

Where is the error?

Determining Responsibility

```python
def function_1(x,y):
    """Returns: result of function_2

    Precondition: x, y numbers"""
    return function_2(x,y)


def function_2(x,y):
    """Returns: x divided by y

    Precondition: x, y numbs, y > 0"""
    return x/y

print(function_1(1,0))
```

Traceback (most recent call last):

File "error1.py", line 32, in <module>
print(function_1(1,0))

File "error1.py", line 18, in function_1
return function_2(x,y)   Error!

File "error1.py", line 28, in function_2
return x/y

ZeroDivisionError: division by zero

Determining Responsibility

```python
def function_1(x,y):
    """Returns: result of function_2

    Precondition: x, y numbs, y > 0"""
    return function_2(x,y)


def function_2(x,y):
    """Returns: x divided by y

    Precondition: x, y numbs, y > 0"""
    return x/y


print(function_1(1,0))
```

Traceback (most recent call last):

File "error1.py", line 32, in <module>
   print(function_1(1,0))

Error!

File "error1.py", line 18, in function_1
   return function_2(x,y)

File "error1.py", line 28, in function_2
   return x/y

ZeroDivisionError: division by zero

Aiding the Search Process

- Responsibility is "outside of Python"
  - Have to step through the error message
  - Compare to specification at each step

- How can we make this easier?
  - What if we could control the error messages?
  - Write responsibility directly into error?
  - Then *only need to look at error message*

- We do this with **assert statements**

Assert Statements

- **Form 1:** `assert` <boolean>
  - Does nothing if boolean is True
  - Creates an error is boolean is False
- **Form 2:** `assert` <boolean>, <string>
  - Very much like form 2
  - But error message includes the string
- Statement to **verify a fact is true**
  - Similar to `assert_equals` used in unit tests
  - But more versatile with complete **stack trace**

Why Do This?

- Enforce preconditions!
  - Put precondition as assert.
  - If violate precondition, the program crashes
- Provided code in A3 uses asserts heavily
  - First slide of lecture!

```
def exchange(from_c, to_c, amt)
    """Returns: amt from exchange
        Precondition: amt a float..."""
    assert type(amt) == float
    ...
```

Will do yourself in **A4**.

```
assert <boolean>            # Creates error if <boolean> false
assert <boolean>, <string>  # As above, but displays <String>
```

Example: Anglicizing an Integer

```
def anglicize(n):

    """Returns: the anglicization of int n.

    Precondition: n an int, 0 < n < 1,000,000"""
    assert type(n) == int, repr(n)+' is not an int'
    assert 0 < n and n < 1000000, repr(n)+' is out of range'
    # Implement method here...
```

Example: Anglicizing an Integer

```python
def anglicize(n):

    """Returns: the anglicization of int n.

    Precondition: n an int, 0 < n < 1,000,000"""
    assert type(n) == int, repr(n)+' is not an int'
    assert 0 < n and n < 1000000, repr(n)+' is out of range'
    # Implement method here...
```

Check (part of) the precondition

Error message when violated

Aside: Using **repr** Instead of **str**

```
>>> msg = str(var)+' is invalid'
>>> print(msg)
2 is invalid
```

- Looking at this output, what is the type of var?

  A: **int**
  B: **float**
  C: **str**
  D: Impossible to tell

Aside: Using **repr** Instead of **str**

```
>>> msg = str(var)+' is invalid'
>>> print(msg)
2 is invalid
```

- Looking at this output, what is the type of `var`?

  A: **int**
  B: **float**
  C: **str**
  D: Impossible to tell   **CORRECT**

Aside: Using **repr** Instead of **str**
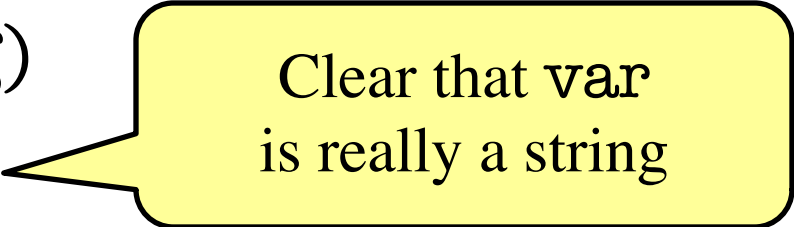
```
>>> msg = str(var)+' is invalid'
>>> print(msg)
2 is invalid


>>> msg = repr(var)+' is invalid'
>>> print(msg)
'2' is invalid
```

Clear that `var` is really a string

Enforcing Preconditions is Tricky!

```
def lookup_netid(nid):

    """Returns: name of student with netid nid.

    Precondition: nid is a string, which consists of
    2 or 3 letters and a number"""
    assert ?????
```

Assert use expressions only.
Cannot use if-statements.
Each one must fit on one line.

Sometimes we will
only enforce part of
the precondition

Enforcing Preconditions is Tricky!

```python
def lookup_netid(nid):

    """Returns: name of student with netid nid.

    Precondition: nid is a string, which consists of
    2 or 3 letters and a number"""
    assert type(nid) == str, repr(nid) + ' is not a string'
    assert nid.isalnum(), nid+' is not just letters/digits'
```

Returns True if s contains
only letters, numbers.

Does this catch
all violations?

Using Functions to Enforce Preconditions

```python
def exchange(src, dst, amt):

    """Returns: amount of src received.

    Precondition: src is a valid currency code
    Precondition: dst is a valid currency code
    Precondition: amt is a float"""

    assert ??????, repr(src) + ' not valid'

    assert ??????, repr(dst) + ' not valid'

    assert type(amt)==float, repr(amt)+' not a float'
```

Using Functions to Enforce Preconditions

```python
def exchange(src, dst, amt):

    """Returns: amount of src received.

    Precondition: src is a valid currency code
    Precondition: dst is a valid currency code
    Precondition: amt is a float"""

    assert is_currency(src), repr(src) + ' not valid'

    assert is_currency(dst), repr(dst) + ' not valid'

    assert type(amt)==float, repr(amt)+' not a float'
```

Recovering from Errors

- Suppose we have this code:

```
result = input('Number: ')        # get number from user

x = float(result)                 # convert string to float

print('The next number is '+str(x+1))
```

- What if user mistypes?

```
Number: 12a

Traceback (most recent call last):
  File "prompt.py", line 13, in <module>
    x = float(result)
ValueError: could not convert string to float: '12a'
```

Ideally Would Handle with Conditional

```python
result = input('Number: ')      # get number from user
if isfloat(result):

    x = float(result)           # convert to float
    print('The next number is '+str(x+1))
else:
    print('That is not a number!')
```

Does not Exist

Using Try-Except

```
try:
    result = input('Number: ')    # get number
    x = float(result)             # convert to float
    print('The next number is '+str(x+1))
except:
    print('That is not a number!')
```

Similar to if-else
- But always does the try block
- Might not do **all** of the try block

Using Try-Except

```
try:

    result = input('Number: ')    # ge...

    x = float(result)             # convert to float

    print('The next number is '+str(x+1))

except:

    print('That is not a number!')
```

Conversion may crash!

Execute if crashes

Similar to if-else
- But always does the try block
- Might not do **all** of the try block

Try-Except is Very Versatile

```python
def isfloat(s):
    """Returns: True if string
    s represents a float"""
    try:
        x = float(s)
        return True
    except:
        return False
```

Conversion to a float might fail

If attempt succeeds, string s is a float

Otherwise, it is not

Try-Except and the Call Stack
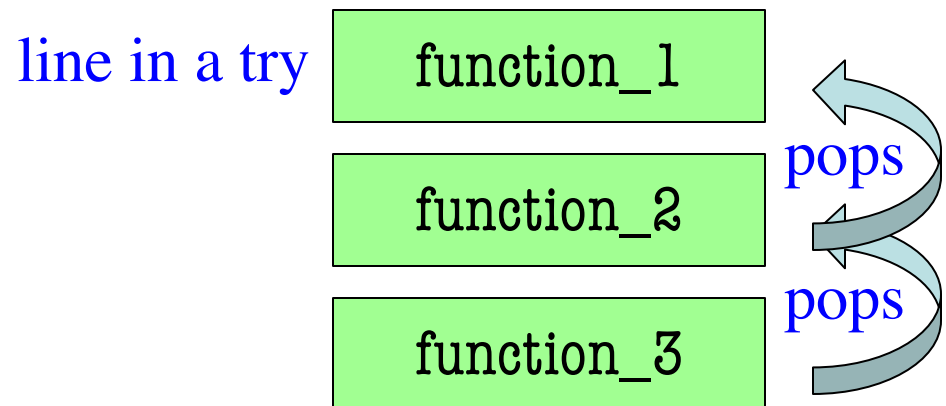
```
# recover.py


def function_1(x,y):
    try:
        return function_2(x,y)
    except:
        return float('inf')


def function_2(x,y):
    return function_3(x,y)


def function_3(x,y):
    return x/y # crash here
```

- Error "pops" frames off stack
  - Starts from the stack bottom
  - Continues until it sees that current line is in a try-block
  - Jumps to except, and then proceeds as if no error

line in a try

Try-Except and the Call Stack

```
# recover.py


def function_1(x,y):
    try:
        return function_2(
    except:
        return float('inf')


def function_2(x,y):
    return function_3(x,y)


def function_3(x,y):
    return x/y # crash here
```

How to return ∞ as a float.

- **Error "pops" frames off stack**
  - from the stack bottom
  - ...es until it sees that current line is in a try-block
  - Jumps to except, and then proceeds as if no error

- **Example**:
  ```
  >>> print function_1(1,0)
  inf
  >>>
  ```

No traceback!

Tracing Control Flow

```python
def first(x):
    print('Starting first.')
    try:
        second(x)
    except:
        print('Caught at first')
    print('Ending first')


def second(x):
    print('Starting second.')
    try:
        third(x)
    except:
        print('Caught at second')
    print('Ending second')
```

```python
def third(x):
    print('Starting third.')
    assert x < 1
    print('Ending third.')
```

What is the output of first(2)?

Tracing Control Flow

```python
def first(x):
    print('Starting first.')
    try:
        second(x)
    except:
        print('Caught at first')
    print('Ending first')


def second(x):
    print('Starting second.')
    try:
        third(x)
    except:
        print('Caught at second')
    print('Ending second')
```

```python
def third(x):
    print('Starting third.')
    assert x < 1
    print('Ending third.')
```

What is the output of first(2)?

'Starting first.'

'Starting second.'

'Starting third.'

'Caught at second'

'Ending second'

'Ending first'

Tracing Control Flow

```python
def first(x):
    print('Starting first.')
    try:
        second(x)
    except:
        print('Caught at first')
    print('Ending first')


def second(x):
    print('Starting second.')
    try:
        third(x)
    except:
        print('Caught at second')
    print('Ending second')
```

```python
def third(x):
    print('Starting third.')
    assert x < 1
    print('Ending third.')
```

What is the output of first(0)?

Tracing Control Flow

```python
def first(x):
    print('Starting first.')
    try:
        second(x)
    except:
        print('Caught at first')
    print('Ending first')


def second(x):
    print('Starting second.')
    try:
        third(x)
    except:
        print('Caught at second')
    print('Ending second')
```

```python
def third(x):
    print('Starting third.')
    assert x < 1
    print('Ending third.')
```

What is the output of first(0)?

'Starting first.'

'Starting second.'

'Starting third.'

'Ending third'

'Ending second'

'Ending first'